



Part# 9595

Capture Hazardous Spills From Railroad Tanker Cars and Locomotives

Ultra-Track Pans have been designed to provide spill containment at industrial rail sidings, locomotive maintenance and fueling facilities. Available in virtually any length, Ultra-Track Pans may be used to collect small spills and leaks OR to capture and channel off significant spills caused by defective equipment or a major overflow.

- Prevent Costly Cleanup and Regulatory Fines.
- Slip-Resistant Design — Entire top surface is safe to walk on, even when wet or oily.
- All polyethylene construction — Rugged Track Pans withstand harsh chemicals and are designed to function in temperatures ranging from -40° F to +140° F.
- Sealed System — Polyethylene gaskets keep spills from falling between the rails and Pans.
- Trucks and other vehicles can drive over Track Pans with grates in place.*
- Economical, easy to install

Optional Track Pan Covers Keep Rainwater Out Of The Pans, Providing Effective Stormwater Management

Unique stormwater feature is designed to eliminate “pooling” of rain that falls on top of the Center Pan Covers; rain is channeled onto the ballast between the tracks, stays out of the Pans.

*To drive over Track Pans, firm footing must be beneath the Pans; also must “ramp up” to Side Pans with asphalt or concrete.



Modular Design Center and Side Pans are 53.5” long; containment areas can be easily assembled to any length desired.

Ultra-Track Pans are available in two (2) models:



(1) Track Pans with Grates, No Covers



(2) Track Pans with Grates and Covers




Cover for Center Track Pan Part# 9580



Modular Track Pans can be assembled in any desired length — additional Pans can be added as your containment needs grow.

Center Track Pan Covers Center Cover Overlap Lip

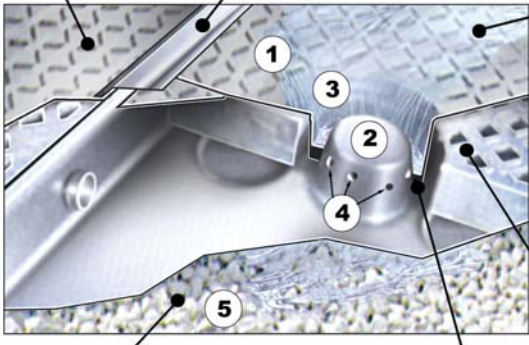

Stormwater Flow — Rain that falls on top of the Center Track Pan Cover (1) is channeled toward the Stormwater Feature (2). It then “cascades” down the cover “spout,” (3) through the “stormwater ports” (4) and onto the ballast (5).

Track Pan Grate (1 of 2 in each Center TrackPan)

Ballast below Center Track Pans

Stormwater gasket seats just below the stormwater ports.



Large, 3”-diameter flow-through channels allow spills to quickly travel from one pan to the next. Channels are located at the low point in each Center and Side Track Pan.

- **Low Maintenance** — Unlike carbon steel track pans, Track Pans will not rust or corrode. Polyethylene resin is treated with a UV inhibitor, resists degrading effects of the sun.
- **Low Cost Installation** — Lightweight Track Pans can be easily installed without heavy lifting equipment, i.e., forklifts, cranes, backhoes, etc. Minimal tools and labor required.
- **Slip Resistant Surfaces** — Pans, grates and covers have been designed with safety in mind. All top surfaces resist slips when wet or oily.
- **Long Work Life** — Estimated to perform for 20–30 years; longer than fiberglass pans.
- **Meets SPCC and EPA Stormwater Management Regulations.**
- **Also meets New York State Chemical Bulk Storage Regulation Section 599.17c — Secondary Containment for Transfer Stations.**

Installation Is Simple!



Flow-through channels — All Pans are connected “end-to-end” with bulkhead fittings, and a 3-inch diameter flow-through channel.



Closed-cell, polyethylene gaskets are then installed to provide a seal between the Pans and rails. (Black gaskets are provided.)



Side Pans are secured in place with rebar or other fasteners. (2-foot-long rebar fasteners with protective caps are available as options.)

CALL FOR A FREE VIDEO OR CD-ROM!

Visit www.trackpans.com for more detailed information.

NOTE: Ultra-Track Pans can also be ordered as complete systems: Popular 9-foot, 40-foot and 60-foot systems are available.

ULTRA-TRACK PANS	
Track Pans with Grates, No Covers	Track Pan Covers Only
Part# 9566: Center Track Pan with Grates (Includes 2 bulkhead fittings, 4 gaskets, 2 grates) Dimensions: 53 1/2" x 53 1/2" x 6" (1,359 mm x 1,359 mm x 153 mm) Weight: 112 lbs. (51 kg) • Containment Capacity: 18 gallons (69 L)	Part# 9580: Cover for Center Track Pan Dimensions: 55" x 52 1/2" (1,397 mm x 1,333 mm) Weight: 24 lbs. (11 kg)
Part# 9576: Side Track Pan with Grate (Includes 1 bulkhead fitting, 2 gaskets, 1 grate) Dimensions: 53 1/2" x 27 1/2" x 6" (1,359 mm x 699 mm x 153 mm) Weight: 58 lbs. (26 kg) • Containment Capacity: 19 gallons (72 L)	Part# 9581: Cover for Side Track Pan Dimensions: 55" x 28 1/4" (1,397 mm x 717 mm) Weight: 11 lbs. (5 kg)
Options: Part# 9584: Rebar Fasteners with Protective Caps, 20-Pack • Part# 9559: 3" dia. Bulkhead Fitting (for below-grade piping)	

U.S. Patent Nos. 5,562,047; 6,173,856; 6,305,569



All Center and Side Track Pans are molded with pipe fitting locators at their lowest point. Below-grade piping can be installed to channel large spills to oil/water separators, holding ponds, etc.